



Quality Engineered Solutions

Industrial Conveyor Belts



Table of Contents

The LEGG Family of Belts

Viper Line	4
Legend Line.....	6
Champion Line.....	10
Cover Compounds	14
Profiles	18
Belt Tops	21
Vacuum Filter Belts	22

Learn more at www.LEGGbelting.com

Belts for Every Customer and Application

LEGG American-made, quality engineered belts meet the demands of the harshest environments. We can also specially engineer belts to your exact specifications.

Our belting products are the result of a commitment to excellence and a dedication to quality that runs deep. Since 1939, LEGG has been serving the needs of a variety of industries by providing not only products, but also technology-based solutions that meet your specific belting needs.

Our philosophy is simple: We build the highest quality products using the best raw materials. This includes utilizing the best manufacturing processes, employing highly skilled personnel and using a proven distribution network. We fully stand behind these products with competitive pricing. Our ultimate goal is to ensure satisfaction for our customers –you–by providing the most flexible solutions in the industry.



The LEGG Advantage

From start to finish, top to bottom, inside and out – we ensure that our conveyor belts meet our customers’ high expectations.

- › Manufactured in the USA since 1939
- › Time-proven design and construction; outstanding quality to meet the needs of distributors and end users in a variety of markets, both industrial and agricultural
- › Committed to providing quality products
- › Marketed through an international distribution network using the most efficient channels possible, including distributors/dealers and direct to OEMs
- › Committed to continuous improvement, from design and production, to distribution and customer service
- › An ISO 9001:2015 company; using materials and manufacturing processes that meet or exceed the highest industry standards
- › A true innovator in the manufacture of specialty belting and compounds

Not warrantied against water wicking or water blistering
Permanent elongation good at 0.8%

The performance of a conveyor belt is more than fabric and rubber. Its performance is greater than the sum of its parts.

The LEGG conveyor belt portfolio offers superior quality and performance with a variety of textile constructions and compounds designed to extend belt life, increase performance and improve overall operating costs. We help move your business along by helping you work smarter.

- › LEGG carcass selections are crafted to the highest quality and feature reliable tension ratings, safety-tested designs, superior adhesions and unbroken plies
 - Offering a wide variety of carcass selections
 - Our Legend Line features S&Z twist construction that significantly improves belt tracking
- › LEGG cover compounds are engineered for extended belt life and increased carcass performance at competitive prices
 - Rubber covers offer strength and durability for heavy-duty needs
 - Proven compounds for a wide range of applications or tailored to specific needs
 - Premier polymers feature a supple durometer without compromising belt performance
- › LEGG profile belting features integrally molded designs to ensure cleat performance





VIPER

Its Unique Weave is the Solution for Demanding Applications

The yarns in plain woven fabrics have a natural crimp. Once the belt is put under tension, this crimp is pulled out, resulting in belt stretch. The straight warp yarns of our Viper and Viper II fabric range do not straighten out like crimped woven yarns, thus reducing much of the initial belt stretch. The belt design provides for maximum load support yet remains quite flexible for high-tension constructions. This makes our Viper Line a great choice for wide conveyors, as well as narrow, high-tension, long-distance conveyors.

Designed for Impact Resistance

LEGG uses very wide yarns in the Viper and Viper II one- and two-ply belts to give them tremendous breaking strength. These yarns are also much more resistant to rip, tear and puncture than the lighter yarns found in plain woven belt fabrics, which require three, four or five plies for equal strength. Once the belts have been vulcanized with premium rubber covers and a thick rubber skim for two-ply constructions, they're fully equipped to dampen impact forces and will absorb stresses put on the belts by large/heavy materials.

- › The high-modulus straight warp carcass, incorporating longitudinal warp yarns with virtually no crimp, was engineered for low stretch
- › Unique polyester/nylon/nylon carcass has unmatched impact resistance
- › Polyester warp + nylon weft + nylon binder = excellent rip & tear resistance
- › The Viper one- and two-ply carcass designs provide excellent troughability when compared to multi-ply, high-strength belt constructions
- › Superb load support allows for safe material transport at wide width
- › The Viper high tensile constructions remain flexible enough to bend around small pulleys

VIPER – Polyester/Nylon/Nylon Straight Warp Premium Carcass

Number of Plies	1	1	1	1
Operating Tension (PIW)	220	330	440	550
Elevator Rating	185	280	375	470
Carcass Gauge (in.)	0.095	0.120	0.125	0.130
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	14	18	20	24
61-80% Rated Tension	12	16	18	20
Up to 60% Rated Tension	10	14	16	18
Maximum Elevator Bucket Projection (in.)				
Light Duty (Grain)	8	10	10	12
Heavy Duty (Industrial)	7	9	10	10



VIPER II – Polyester/Nylon/Nylon Straight Warp Premium Carcass

Number of Plies	2	2	2
Operating Tension (PIW)	400	600	800
Elevator Rating	340	610	680
Carcass Gauge (in.)	0.190	0.254	0.310
Minimum Pulley Diameter (in.)			
81-100% Rated Tension	24	24	30
61-80% Rated Tension	12	16	18
Up to 60% Rated Tension	10	14	16
Maximum Elevator Bucket Projection (in.)			
Light Duty (Grain)	8	10	10
Heavy Duty (Industrial)	7	9	10


Recommended Troughability

Minimum Belt Width in Inches				
Belt Specification	1/220	1/330	1/440	1/550
20° Idler	14	20	24	24
35° Idler	18	24	30	30
45° Idler	24	30	36	36
Belt Specification	2/400	2/600	2/800	
20° Idler	24	24	30	
35° Idler	30	30	36	
45° Idler	36	36	42	

Recommended Load Support

Material Weight lb./ft.³	0-40			41-80			81-120			121-180			181-240		
Degree of Trough	20°	35°	45°	20°	35°	45°	20°	35°	45°	20°	35°	45°	20°	35°	45°
Belt Specification	Maximum Belt Width in Inches														
1/220	48	42	36	42	36	36	36	30	NR	30	NR	NR	NR	NR	NR
1/330	72	60	54	60	54	48	54	48	42	48	42	NR	42	NR	NR
1/440	84	72	60	72	60	54	60	54	48	54	48	36	48	42	NR
1/550	84	72	60	72	60	48	72	60	48	60	54	42	54	48	42
11/400	84	72	66	72	66	60	72	60	54	60	54	48	54	48	42
11/600	84	84	72	84	72	72	84	72	60	72	60	54	60	54	48
11/800	84	84	84	84	84	84	84	84	72	84	72	60	72	60	54

Viper & Viper II Weave

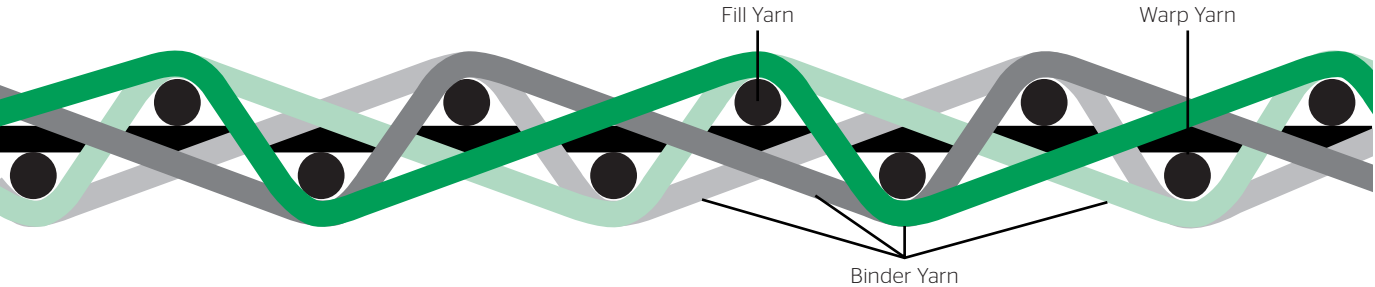



LEGEND

POLYESTER WARP • NYLON FILL • S&Z TWIST

Yes, they DO still make them like they used to.
This belt is proof.

Our Legend carcass is engineered for maximum performance for a wide range of applications. Legend's polyester/nylon construction offers excellent strength, flexibility and is moisture, chemical and heat resistant.

- › Polyester warp yields great strength with minimal stretch
- › Nylon fill cords provide strength, flexibility and load support
- › Uses S & Z twist for superior tracking performance
- › In combination with our premium compounds offering high tensile strength, elongation and abrasion
- › Available in 110lb, 125lb, 200lb, 225lb, 235lb and 250lb fabric ratings.

LEGEND – 110 PIW Polyester/Nylon

Number of Plies	2	3	4	5
Operating Tension (PIW)	220	330	440	550
Elevator Rating	190	290	380	480
Carcass Gauge (in.)	0.125	0.205	0.245	0.310
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	16	20	25	30
61-80% Rated Tension	14	18	22	25
Up to 60% Rated Tension	10	14	16	18
Maximum Elevator Bucket Projection (in.)				
Light Duty (Grain)	6	8	9	10
Heavy Duty (Industrial)	5	7	8	9

LEGEND – 125 PIW Polyester/Nylon

Number of Plies	2	3	4	5
Operating Tension (PIW)	250	375	500	625
Elevator Rating	215	320	425	530
Carcass Gauge (in.)	0.132	0.221	0.250	0.319
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	16	20	25	30
61-80% Rated Tension	14	18	22	25
Up to 60% Rated Tension	12	16	18	20
Maximum Elevator Bucket Projection (in.)				
Light Duty (Grain)	7	8	10	11
Heavy Duty (Industrial)	6	7	9	9



LEGEND – 200 PIW Polyester/Nylon

Number of Plies	2	3	4	5
Operating Tension (PIW)	400	600	800	1000
Elevator Rating	350	500	680	850
Carcass Gauge (in.)	0.160	0.265	0.345	0.440
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	20	24	30	34
61-80% Rated Tension	18	20	26	30
Up to 60% Rated Tension	14	16	20	24
Maximum Elevator Bucket Projection (in.)				
Light Duty (Grain)	10	11	12	13
Heavy Duty (Industrial)	9	10	11	12

LEGEND – 225 PIW Polyester/Nylon

Number of Plies	2	3	4	5
Operating Tension (PIW)	450	675	900	1125
Elevator Rating	380	575	765	955
Carcass Gauge (in.)	0.182	0.299	0.356	0.453
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	20	24	30	34
61-80% Rated Tension	18	20	26	30
Up to 60% Rated Tension	14	16	22	26
Maximum Elevator Bucket Projection (in.)				
Light Duty (Grain)	10	11	13	14
Heavy Duty (Industrial)	9	10	12	122

LEGEND – 235 PIW Polyester/Nylon

Number of Plies	2	3	4	5
Operating Tension (PIW)	470	705	940	1175
Elevator Rating	400	600	800	1000
Carcass Gauge (in.)	0.155	0.265	0.320	0.405
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	20	24	30	34
61-80% Rated Tension	18	20	26	30
Up to 60% Rated Tension	14	16	20	24
Maximum Elevator Bucket Projection (in.)				
Light Duty (Grain)	10	11	13	14
Heavy Duty (Industrial)	9	10	12	12

LEGEND – 250 PIW Polyester/Nylon

Number of Plies	2	3	4	5
Operating Tension (PIW)	500	750	1000	1250
Elevator Rating	425	640	850	1060
Carcass Gauge (in.)	0.227	0.372	0.452	0.582
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	22	24	32	36
61-80% Rated Tension	20	22	28	32
Up to 60% Rated Tension	16	18	24	28
Maximum Elevator Bucket Projection (in.)				
Light Duty (Grain)	11	12	13	14
Heavy Duty (Industrial)	10	11	12	13



Recommended Load Support

Material Weight lb./ft.³		0-40			41-80			81-120			121-180			181-240		
Degree of Trough		20°	35°	45°	20°	35°	45°	20°	35°	45°	20°	35°	45°	20°	35°	45°
Belt Specification		Maximum Belt Width in Inches														
2/220		42	42	36	36	36	30	30	30	24	24	24	18	NR	NR	NR
3/330		60	54	54	54	48	48	42	42	42	36	36	36	30	30	30
4/440		72	66	60	60	60	60	54	54	54	48	48	42	42	42	36
5/550		72	72	66	72	72	66	66	60	54	60	54	48	54	54	48
2/250		48	48	42	42	42	36	36	36	30	30	30	NR	24	NR	NR
3/375		60	60	60	54	54	54	48	48	48	42	42	42	36	36	30
4/500		72	72	66	66	66	60	60	60	54	54	54	48	48	48	42
5/625		84	78	78	72	72	66	66	60	60	54	54	54	48	48	48
2/400		54	54	54	48	48	48	42	42	36	36	36	30	30	24	24
3/600		66	66	60	60	54	54	54	48	48	42	42	36	36	30	30
4/800		78	72	72	66	66	60	60	54	54	48	48	48	42	42	42
5/1000		84	78	72	72	72	66	66	66	60	60	60	60	54	48	48
2/450		60	60	54	54	48	48	42	42	36	36	30	30	24	24	NR
3/675		72	66	60	66	60	54	54	54	48	48	48	42	42	36	36
4/900		84	72	72	72	66	66	72	60	60	54	54	48	48	42	42
5/1125		84	78	78	72	72	72	66	66	66	60	60	60	54	54	48
2/470		54	54	54	48	48	48	42	42	36	36	36	30	30	24	NR
3/705		66	66	60	60	54	54	54	48	48	42	42	36	36	30	30
4/940		78	72	72	66	66	60	60	54	54	48	48	48	42	42	42
5/1175		84	78	72	72	72	66	66	66	60	60	60	60	54	48	48
2/500		60	60	54	54	54	48	48	42	42	36	36	30	30	24	24
3/750		72	66	66	54	54	54	48	48	48	42	42	36	36	30	30
4/1000		84	78	72	66	66	60	60	54	54	48	48	48	42	42	36
5/1250		90	84	72	72	72	66	66	60	60	54	54	54	48	48	42



Recommended Troughability

Minimum Belt Width in Inches				
Belt Specification	2/220	3/330	4/440	5/550
20° Idler	14	18	24	30
35° Idler	18	24	30	36
45° Idler	22	28	36	42
Belt Specification	2/250	3/375	4/500	5/625
20° Idler	16	20	24	30
35° Idler	18	24	30	36
45° Idler	24	30	36	42
Belt Specification	2/400	3/600	4/800	5/1000
20° Idler	20	24	36	42
35° Idler	24	30	42	48
45° Idler	24	36	42	54
Belt Specification	2/450	3/675	4/900	5/1125
20° Idler	20	24	30	36
35° Idler	24	30	36	42
45° Idler	30	36	42	48
Belt Specification	2/470	3/705	3/940	5/1175
20° Idler	20	24	36	42
35° Idler	22	28	40	48
45° Idler	24	32	42	54
Belt Specification	2/500	3/750	4/1000	5/1250
20° Idler	24	28	40	46
35° Idler	26	32	44	52
45° Idler	28	36	46	58





CHAMPION

Formulated to meet the challenges of today’s world market

Our versatile Champion line truly lives up to its name. We combine this carcass with LEGG’s standard general service compounds to create a belt that will meet your demands at a competitive price. Our compounds use high-quality polymers, additives and curing agents – the true competitor that performs like a Champion!

- › Polyester/Polyester carcass
- › Yields good strength with minimal stretch, making it easy to track and train
- › Good resistance to rips, tears, punctures and impact
- › Superior agility and flexibility supports belt troubhability under lighter loads
- › Features excellent chemical resistance and mechanical fastener retention
- › Available in 75lb, 110lb and 150lb fabric ratings.

** LEGG Co. does not recommend the use of Poly/poly textiles in elevator belt applications if a poly/nylon is available*



CHAMPION – 75 PIW Polyester/Polyester

Number of Plies	2	3	4	5
Operating Tension (PIW)	150	225	300	375
Elevator Rating	140	200	275	340
Carcass Gauge (in.)	0.087	0.153	0.188	0.242
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	8	12	19	24
61-100% Rated Tension	5	10	15	19
Up to 60% Rated Tension	3	8	10	15

CHAMPION – 110 PIW Polyester/Polyester

Number of Plies	2	3	4	5
Operating Tension (PIW)	220	330	440	550
Elevator Rating	190	280	375	470
Carcass Gauge (in.)	0.125	0.212	0.238	0.304
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	16	20	24	30
61-100% Rated Tension	14	18	20	24
Up to 60% Rated Tension	12	14	18	18

CHAMPION – 150 PIW Polyester/Polyester

Number of Plies	2	3	4	5
Operating Tension (PIW)	300	450	600	750
Elevator Rating	270	415	550	695
Carcass Gauge (in.)	0.164	0.276	0.330	0.420
Minimum Pulley Diameter (in.)				
81-100% Rated Tension	18	22	28	32
61-100% Rated Tension	16	18	24	28
Up to 60% Rated Tension	12	13	18	20
Maximum Elevator Bucket Projection (in.)				
Light Duty (Grain)	9	10	11	12
Heavy Duty (Industrial)	8	9	10	11



Recommended Load Support


Material Weight lb./ft. ³	0-40			41-80			81-120			121-180			181-240		
Degree of Trough	20°	35°	45°	20°	35°	45°	20°	35°	45°	20°	35°	45°	20°	35°	45°
Belt Specification	Maximum Belt Width in Inches														
2/150	36	36	30	30	30	24	24	18	18	18	NR	NR	NR	NR	NR
3/225	48	48	42	42	42	42	42	36	36	30	30	24	24	NR	NR
4/300	60	60	54	60	60	54	54	54	48	54	48	42	48	42	36
5/375	72	60	54	60	60	54	54	54	48	54	48	42	48	42	36
2/220	42	42	36	36	36	30	30	30	24	24	24	18	NR	NR	NR
3/330	54	54	54	48	48	48	42	42	42	36	36	36	30	30	30
4/440	66	66	60	60	60	54	54	54	48	48	48	42	42	42	36
5/550	78	72	72	72	66	66	66	60	60	54	54	48	48	48	42
2/300	48	48	48	42	42	42	36	36	36	30	30	24	NR	NR	NR
3/450	60	60	60	54	54	54	48	48	48	42	42	42	NR	NR	NR
4/600	72	66	66	66	60	60	60	54	54	54	48	48	48	48	48
5/750	84	78	78	72	72	66	66	60	60	60	54	54	54	54	54



Recommended Troughability

Minimum Belt Width in Inches				
Belt Specification	2/150	3/225	4/300	5/375
20° Idler	14	18	24	30
35° Idler	18	24	30	36
45° Idler	22	28	36	42
Belt Specification	2/220	3/330	4/440	5/550
20° Idler	16	18	24	30
35° Idler	20	24	30	36
45° Idler	24	30	36	42
Belt Specification	2/300	3/450	4/600	5/750
20° Idler	18	24	30	36
35° Idler	24	30	36	36
45° Idler	30	36	42	42



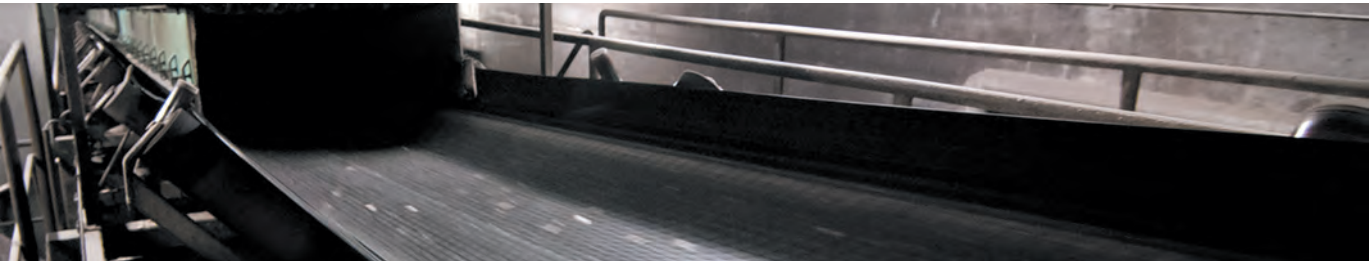

Cover Compounds

General Purpose/Abrasion Resistant

GII – General duty compound. Good abrasion, cut and gouge resistance makes it a smart economical choice.

XT-GII – Compound exceeds ARPM Grade 2 specs. Yields very good abrasion, tensile, tear and elongation values. Combine with a Legend carcass for a great performing belt.

GI – General purpose compound. Offers good abrasion, cut and gouge resistance. An excellent choice for handling larger rock or sharp, heavy material.

XT-GI – Exceeds ARPM Grade 1 specs. An excellent choice when better abrasion, cut and gouge resistance is required.

FF (Force Field) – Specially formulated for high-abrasion applications, Force Field is a superior compound, ready for the long haul.

GI-P (Grade I Premium) – Premium compound for heavy rock or high-impact applications. This unprecedented compound offers ultimate abrasion with high elongation and tensile strength to prevent tearing. Couple with a Viper or Legend Polyester/Nylon carcass for primary belt or under crusher belt.

Oil/High Temperature Service

MOR (Moderately Oil Resistant) – A compound formulated for handling oily products that contain, or will be coated with light oils such as pine chips, grains, coke or oil-treated coal.

XT-MOR – Moderately oil-resistant version of the XT-GII compound, it offers a higher degree of oil and abrasion resistance. It is a good compound for handling moderately oily material to resist the terpene content of wood chips and other oily grains.

HH (High Heat) – An EPDM with good-to-excellent heat resistance at temperatures reaching 400°F. It offers outstanding ozone and oxidation resistance, as well as good abrasion resistance. Ideal for handling high temperature and very abrasive products, like clinker.

HAHOR (Hot Asphalt/Heat and Oil Resistant)/VOR (Very Oil Resistant) – A high-heat NBR formulated to withstand the high temperatures and heavy oils of the asphaltting industry. It offers good abrasion and excellent oil resistance. Heat resistant up to 350°F, but only achievable when heavy oil is present; without the presence of oil, not rated above 150°F.



Compound (International Designation)

	Test Standard	Unit	GII	XT-GII (Z,L)	GI	XT-GI	FF (K,W)	GI-P (M,H,X,Y)
Tensile	ASTM D412	PSI (min.)	2000	2200	2500	2700	2610	3626
		MPa (min.)	13.8	15.2	17.2	18.6	18.0	25.0
Elongation	ASTM D412	% (min.)	400	450	450	500	400	450
Hardness	ASTM D2240 A	Shore A	60+5	60+5	60+5	60+5	70+5	70+5
Abrasion Index	DIN 53516	mm³ (max.)	175	175	150	120	90	120
Ozone	ASTM D1171	Pass / Fail	Pass	Pass	Pass	Pass	Pass	Pass
Temperature Range		Fahrenheit (°F)	-40 to 150*	-40 to 150*	-30 to 150*	-40 to 150*	-40 to 150*	-40 to 150*
		Celsius (°C)	-40 to 65*	-40 to 65*	-34 to 65*	-40 to 65*	-40 to 65*	-40 to 65*
Oil Swell	ASTM D471	% (max.)	N/A	N/A	N/A	N/A	N/A	N/A
Static Conductive	ISO 284	YES / NO	N/T	N/T	N/T	N/T	N/T	N/T

* Maximum conveyed material temperature. Cycle times, belt cooling and other conditions may affect belt performance & life cycle.

N/T Not tested

Compound (International Designation)

	Test Standard	Unit	MOR	XT-MOR	HH EPDM	HAHOR/VOR
Tensile	ASTM D412	PSI (min.)	1800	1800	1800	1800
		MPa (min.)	12.4	12.4	12.4	124
Elongation	ASTM D412	% (min.)	400	450	450	450
Hardness	ASTM D2240 A	Shore A	60+5	60+5	65+5	65+5
Abrasion Index	DIN 53516	mm³ (max.)	250	220	200	250
Ozone	ASTM D1171	Pass / Fail	Pass	Pass	Pass	Pass
Temperature Range		Fahrenheit (°F)	-40 to 150*	-40 to 150*	-30 to 400*	-40 to 150*
		Celsius (°C)	-40 to 65*	-40 to 65*	-34 to 204*	-40 to 65*
Oil Swell	ASTM D471	% (max.)	<100	<80	N/A	<10
Static Conductive	ISO 284	YES / NO	N/T	N/T	N/T	NO

* Maximum conveyed material temperature. Cycle times, belt cooling and other conditions may affect belt performance & life cycle.

N/T Not tested





Cover Compounds

Flame-Resistant Services

FR – A compound that meets the requirements of ASTM D-378 13.2 flame retardant test. Suited for below ground applications where fire retardant belt is required; allowed by USBM and MSHA to be used underground as long as it is not a coal mining operation.

FR-MOR (Moderately Oil Resistant) – A compound that meets the requirements of ASTM D-378 13.2 flame retardant test and delivers moderate oil resistance for oily coal or coke applications or product treated with oily additives for dust suppression.

HT-SBR – A compound that delivers excellent abrasion resistance with heat resistance to 300°F.

GHS (Grain Handler Supreme) – It features a high Nitrile composition, making it ideal to handle grains without worry. GHS is ideal for more oily applications like conveying crushed canola but is also well suited for use with mineral oil dust suppression systems.

Food Grade Service

WFG-SBR (White Food Grade SBR) – A compound designed for handling consumable food products, or for products that will be consumed by livestock. SBR offers good abrasion resistance. Cover meets FDA requirement. **Note: WFG-SBR is not static conductive.**

Special Purpose

TPG 45D (Tan Pure Gum Non-Marking) – With an exceptionally high coefficient of friction, this tough compound is excellent where very high cut and gouge resistance is required, combined with a high demand for gripping material and where abrasion is a factor. Non-marking quality is also ideal for the timber products industry.

TAN SBR 60D, TAN SBR 45D (Tan Non Marking SBR) – With good tear and abrasion resistance, this non-marking SBR is good for handling products where marking is not permitted, such as paper handling, finished aluminum parts, planers, sanders, lumber and packaged goods. The coefficient of friction allows this compound to grip product even at steep inclines yet is an economical alternative to TPG. Available in a standard 60-durometer and a softer 45-durometer option. 45D offers 20% improved cover wear resistance and supports gripping action.



Compound (International Designation)

	Test Standard	Unit	FR	FR-MOR	HT-SBR	WFG-SBR	GHS
Tensile	ASTM D412	PSI (min.)	2000	2000	2030	2000	1800
		MPa (min.)	13.8	13.8	14.0	13.8	12.4
Elongation	ASTM D412	% (min.)	450	450	400	450	450
Hardness	ASTM D2240 A	Shore A	60+5	60+5	61+5	60+5	63+5
Abrasion Index	DIN 53516	mm ³ (max.)	200	200	140	250	250
Ozone	ASTM D1171	Pass / Fail	Pass	Pass	Pass	Pass	Pass
Temperature Range		Fahrenheit (°F)	-40 to 150*	-40 to 150*	-40 to 300*	-40 to 150*	-40 to 150*
		Celsius (°C)	-40 to 65*	-40 to 65*	-40 to 150*	-40 to 65*	-40 to 65*
Fire Retardant	MSHA CFR Title 30 Part 14		NO	NO	N/A	N/A	N/A
	ASTM D 378 13.2		YES	YES	N/A	N/A	YES
Oil Swell	ASTM D471	% (max.)	N/A	<90	N/A	N/A	<10
Static Conductive	ISO 284	YES / NO	YES	YES	YES	NO	YES

* Maximum conveyed material temperature. Cycle times, belt cooling and other conditions may affect belt performance & life cycle.

Compound (International Designation)

	Test Standard	Unit	TPG 45D	Tan SBR 60D	Tan SBR 45D
Tensile	ASTM D412	PSI (min.)	3000	2000	1600
		MPa (min.)	20.7	13.8	11.0
Elongation	ASTM D412	% (min.)	500	450	450
Hardness	ASTM D2240 A	Shore A	45+5	60+5	45+5
Abrasion Index	DIN 53516	mm ³ (max.)	250	250	200
Ozone	ASTM D1171	Pass / Fail	Pass	Pass	Pass
Temperature Range		Fahrenheit (°F)	-40 to 150*	-40 to 150*	-40 to 150*
		Celsius (°C)	-40 to 65*	-40 to 65*	-40 to 65*
Oil Swell	ASTM D471	% (max.)	N/A	N/A	N/A
Static Conductive	ISO 284	YES / NO	NO	NO	NO


* Maximum conveyed material temperature. Cycle times, belt cooling and other conditions may affect belt performance & life cycle.



Belt Profiles


We have a profile to meet every need and a design that keeps product moving efficiently

When conveying product up an incline is critical, you need an integrally molded profile solution, where cleat and belt work as one homogenous unit. With LEGG profiles, you'll find high-performance designs that cater to a variety of product needs and conditions, from wood chips and sawdust to rocks, cattle feed and any other bulk material. Available in a wide variety of compound options.

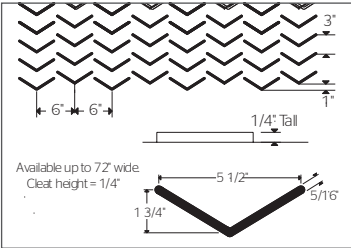


V-CLEAT

- › Excellent product traction and wear
- › Full width slitable construction
- › Handles wood chips, rocks, asphalt, dirt
- › Available in all LEGG carcass options and most covers
- › 24" min. width

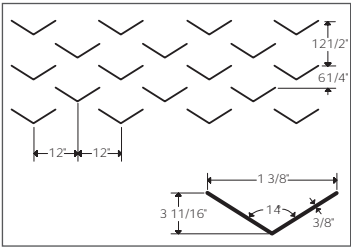


SUPER V

- › Offers cleats twice the width of our popular V-CLEAT
- › Full width slitable construction available up to 72" wide
- › Perfect for conveying wood chips, aggregate and asphalt
- › Available in all LEGG carcass options and most covers

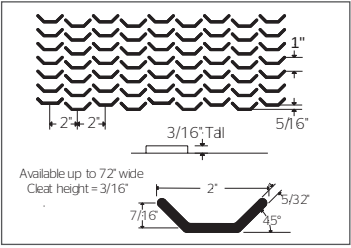

MINI-BITE

- › Excellent for bulk material, such as grain, nut hulls or sawdust
- › Full width slitable construction
- › Available in all LEGG carcass options and most covers
- › 22" min. width

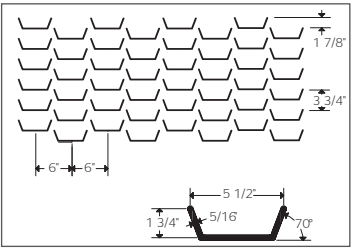


MAXI-BITE

- › Takes more than a Mini-Bite - Maxi-Bite takes it up a notch
- › Aggressive 3/4" tall cleat profile
- › Slitable construction is available up to 60" wide
- › Available in all LEGG carcass options and most covers
- › 42" min. width




Belt Profiles

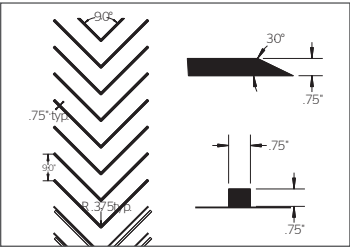


HERCULES

- › Sturdy option offers hours of dependable service
- › 3/4" x 3/4" Chevron style cleat moves bulk material efficiently up inclines
- › Overlapping pattern and 60° bevel provides quiet and smooth return, while 9" spacing gives maximum material traction
- › Available in Legend and Champion carcasses to carry wood chips, rocks or high animal fat cattle feed
- › Available with 24", 30", 36", 42" & 48" widths

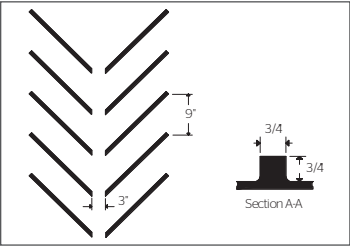



SPLIT HERCULES

- › Same overlapping pattern as HERCULES with a 3" cleating opening in the belt's center
- › Designed to run quiet and smooth on flat return idlers
- › Available with 24", 30", 36", 42" & 48" widths

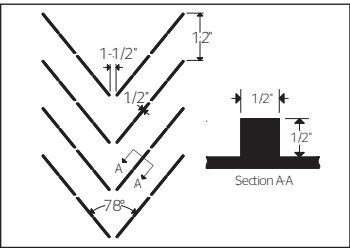


TITAN

- › Chevron-shaped cleats keep product centered as it's agitated during transport
- › 1/2" x 1/2" cleat gives extra bite and offers excellent wear
- › Available in all LEGG carcass options and most covers
- › Available with 18", 24", 30", 36", 42", 48" & 60" widths

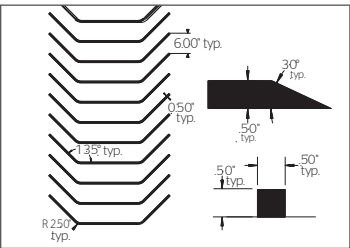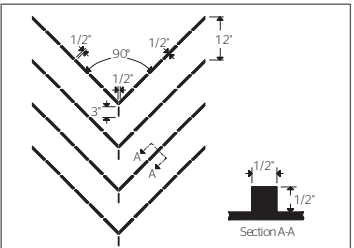

MEGA-BITE

- › 1/2" x 1/2" bucket pattern offers exceptional material bite
- › Integrally molded design ensures cleats won't come loose
- › Angled cleat ends with overlapping pattern enhance quiet, vibration-free return
- › Available in 24", 30" and 36" patterns on up to a 48" belt

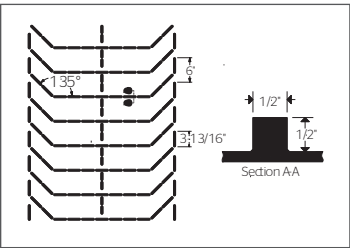


MEGA-BITE II

- › Offers extreme bite to move product up steep inclines
- › 1/2" x 1/2" cleats molded from top cover; won't come loose from the belt
- › Cleat pattern keeps product in belt center
- › 18", 24", 30", 36" and 42" patterns on up to a 48 x 50" belt
- › 42", 48", 54", 60" and 66" patterns on up to a 72" belt
- › Available in all LEGG carcass options and most covers




Belt Profiles

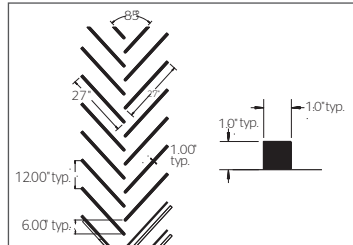


TRACT-R-TREAD

- Cleat pattern offers incredible material bite while maximizing water and small material rollback, ideal for beet and potato pilers
- Full 1 x 1" pattern helps carry large particle sizes up steep inclines
- Great where water flow is essential
- 24" and 36" patterns on up to a 48" belt
- Available on any LEGG carcass and most compounds

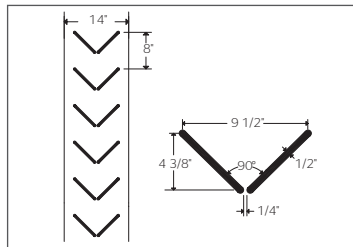


STONE SLINGER

- Specifically developed for slinger conveyors
- Aggressive ¾" tall cleat moves bulk material at high speeds
- Cover compounds are available for various bulk materials such as aggregate or wood chips
- Available in 8" and 10" cleat patterns

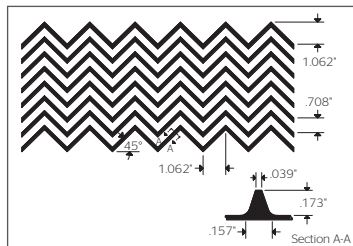

CONTINUOUS CHEVRON

- › Profile designed for round hay balers
- › Useful in multiple agricultural and industrial applications requiring grip
- › Available in widths up to 60"
- › 24" min. width

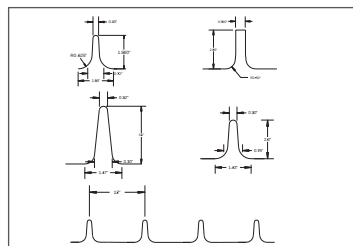

T-CLEATS

- › Choose from a wide variety of cleat heights on any carcass
- › Integrally molded during initial curing for 100% homogenous product
- › Center to center dimensions available on 6", 12", 18" and 24," with other centers available




Belt Tops

DIAMOND TOP • CONTINUOUS CHEVRON • ROUGH TOP

Strong, durable and worth every penny

Our complete line of belt tops with light or heavyweight carcasses are unlike typical belt tops you'll find in the industry. That's because LEGG belt tops are built for strength and durability for a variety of applications. So if you're handling lighter weight materials, like bags of carrots or potato chips, LEGG has a belt top that meets your strength and reliability needs. At LEGG, we know the solution that works for carrots is not the right solution for handling timber, cement, engine blocks or other materials. That is why LEGG's range of profile cover options offer maximum strength with the durability and reliability to get the tough jobs done.

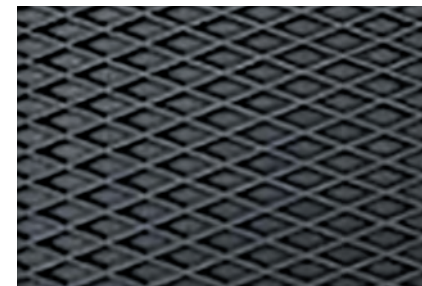

Vacuum Filter Belts

Proven Performance in Any Dewatering Processes

Vacuum filter belts from LEGG are specifically designed to separate liquids and solids on horizontal belt filter systems. These belts support the filter cloth, the filter cake and the filtrate within integrated skirts or with additional curbing. The filtrate is removed by vacuum through the molded grooves in the top cover and the drainage holes in the center of the belt.

- ›

Fabric-Free Zone

In most cases, the textile carcass of the belt must be protected from the filtered media. LEGG offers filter belts with a textile-free drainage zone. The textile carcass is completely embedded in rubber and separated from both the drainage holes and the belt edges, thus protecting the carcass from both chemical and thermal degradation.
- ›

Bottom Guide

Depending on the filter design, the transport belt often requires either a single guide or multiple guides on the bottom of the belt to assist in tracking and to keep the drainage holes centered over the vacuum box. Drainage holes run through the transport belt and bottom guide, allowing access to the collection duct.

Filter Belts

LEGG manufactures the perfect solution for traditional horizontal belt filters in widths up to 60 inches (1.5m). Our filter belts are engineered with molded drainage grooves, a fabric-free drainage zone, an optional bottom guide and in a variety of premium rubber compounds suitable for any HBF application.


Available Applications

- › Mining
- › Chemical Processing
- › Power Generation
- › Waste Management
- › Pharmaceuticals

Complete List of Filter Belts	
904251	3/300PP EPDM 1R2L 12" B25 30"
904252	4/400PP EPDM 1R2L 24" B25 24"
904258	4/400PP EPDM 5R2L 24" B50
907425	4/400PP EPDM(9801) 1R2L 2.750 FFZ 54"B100
908044	4/400PP EPDM 1R2L 47" B50 2.275" FFZ
918057	4/500PN HTSBR(4529) 5R2L 24: B50

Belt Construction

LEGG offers a variety of filter belt widths and constructions. Starting with a construction 24 inches wide with a single bottom guide, to a construction 60 inches wide with five bottom guides, each LEGG filter belt is tailor-made for your specific model of horizontal vacuum filter.

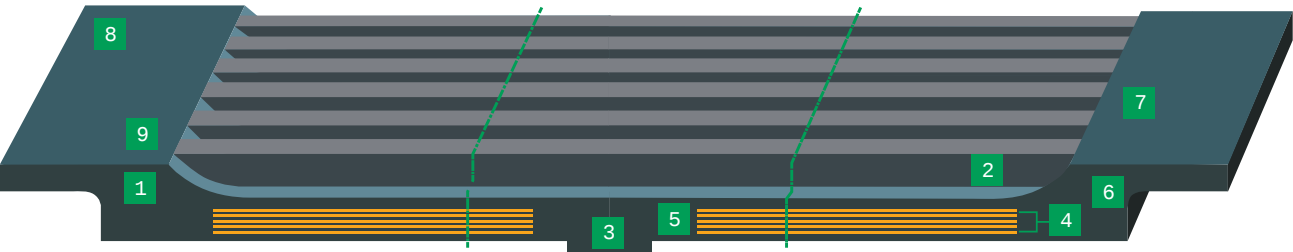

Properties

1. Cover Compound

› Good chemical resistance

› High temperature resistance
2. Molded transverse groove system

› Smooth surface

› Perfect pitch and dimensions of grooves and lands
3. Bottom guide

› Single and multiple guide strip locations available
4. 100% polyester carcass

› High strength

› Low elongation

› Laterally stable
5. Fabric-free drainage zone

› Same physical properties as rubber covers

› Punching or drilling of center holes does not expose fabric carcass
6. Full rubber edge

› Good lateral stability when guide pulleys are used
7. Un-grooved edge zone

› Suitable for cold bonding or vulcanizing rubber curbing onto the belt
8. Upward folding skirting


› Edge zone can be folded up to desired containment height

› No need to attach additional profiles

› Without curbing, required drive and tail pulley diameters are reduced
9. Smooth and seamless transition between base belt surface and side curbing

› Smooth and straight alignment of the filter cloth

› Minimal air stream leakage between belt and filter cloth

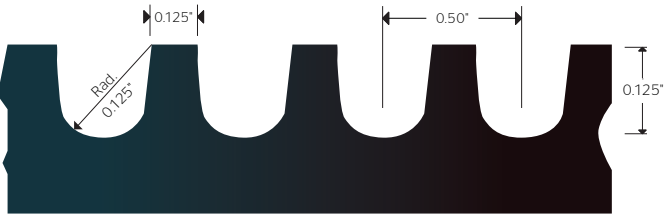

Profile Drainage Channels

LEGG

325 East 10th Street
Halstead, KS 67056 USA
1-800-835-1003
www.LEGGbelting.com



The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2025 ContiTech AG. All rights reserved. For complete information go to: www.continental-industry.com/disl_en

21201235 01/2025